

A

B

C

D



E

F

REV	DESCRIPTION	DESIGN	DATE
A0	Release	蒋建银	2018.01.15

1

1

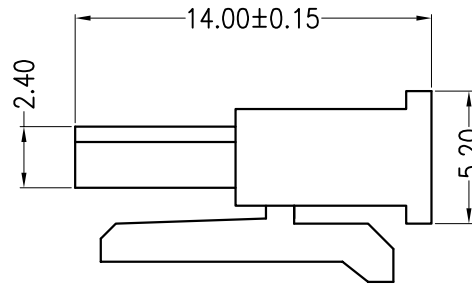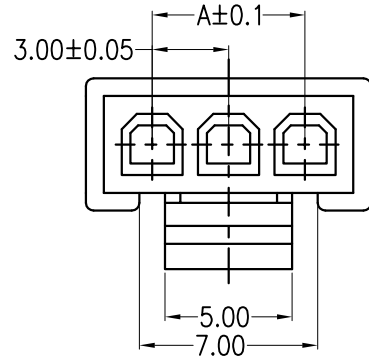

2

2

主要技术参数 Main Specifications

线数 (Poles): 02 to 24

接触电阻 (Contact resistance): $\leq 20m\Omega$

绝缘电阻 (Insulation resistance): $\geq 1000M\Omega$

额定电压 (Rated voltage): 250V AC DC

额定电流 (Rated current): 5.0A AC DC


耐电压 (Withstand Voltage): 1000V AC/minute

温度范围 (Temperature Range): $-25^{\circ}C \sim +85^{\circ}C$

3


3

ORDER INFORMATION:

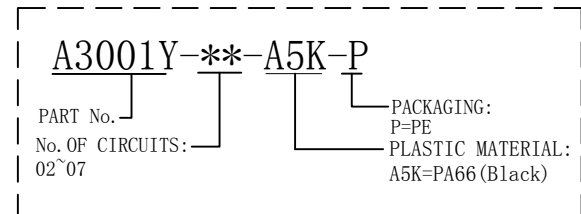

4

4

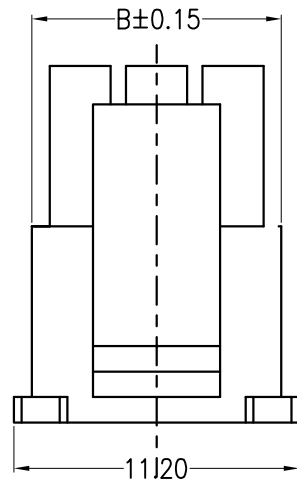

Circuits	Dimensions (mm)	
	A	B
02	3.0	6.8
03	6.0	9.8
05	12.0	15.8
07	18.0	21.8

5

5

C	B	A	ITEM	COMPONENT	Q'TY	MATERIAL	FINISH
		PEDESTAL			1 PCS	PA66	COLOR:BLACK
JKUN 温州健坤接插件有限公司 WENZHOU JKUN CONNECTOR CO., LTD.							
TITLE: -				3.00mmPITCH Housing			
X.±0.5				X.±5'		USE: CUSTOMER	
.X±0.3				.X±2'		APPD: 邵敬和	
.XX±0.25				.XX±1'		CHKD: 田峰	
---				---		DR: 蒋建银	
UNITS: mm				PART NO.:		A3001Y-**-A5K-P	
SCALE 1 : 1				DWG NO.:		JKUN/GCCP-0564	
SHEET 1 / 1							

A

B

C

D

E

F