
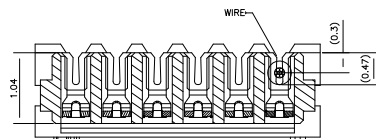
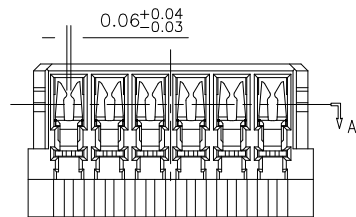




MATED CONDITION



SECTION A-A

CKT	DIMA	DIMB	DIMC
2	0.6	1.3	1.8
3	1.2	1.9	2.4
4	1.8	2.5	3.0
5	2.4	3.1	3.6
6	3.0	3.7	4.2
7	3.6	4.3	4.8
8	4.2	4.9	5.4
9	4.8	5.5	6.0
10	5.4	6.1	6.6
11	6.0	6.7	7.2
12	6.6	8.3	7.8
13	7.2	8.9	8.4
14	7.8	8.5	9.0
15	8.4	9.1	9.6
16	9.0	9.7	10.2

REV	DESIGN	DATE
AO	-	-
-	-	-



主要技术参数 Main Specifications

线数 (Poles): 02 to 16
 接触电阻 (Contact resistance): $\leq 40m\Omega$
 绝缘电阻 (Insulation resistance): $\geq 100M\Omega$
 额定电压 (Rated voltage): 30V AC DC
 额定电流 (Rated current): 0.2A AC DC
 耐电压 (Withstand Voltage): 100V AC/minute
 温度范围 (Temperature Range): $-25^{\circ}C \sim +85^{\circ}C$
 适用线规 (Applicable Wires): 34~36AWG

ORDER INFORMATION:

A0601Y-**-AOK*1-P

PART No. _____
 No.OF CIRCUITS: _____
 02~16
 PLASTIC MATERIAL: _____
 AOK=THERMOPLASTIC(BLACK)

PACKAGING:
 P=PE
 Metal code:
 1=COPPER ALLOY
 PLATING:
 B=Matte Sn
 C=GOLD FLASH

ITEM	COMPONENT	Q'TY	MATERIAL	FINISH
C				
B	CONTACT	N PCS	COPPER ALLOY	MATTE Sn-plated/GOLD FLASH
A	HOUSING	1 PCS	THERMOPLASTIC	UL 94V-0, COLOR:BLACK

JKUN 温州健坤接插件有限公司
 WENZHOU JKUN CONNECTOR CO.,LTD.

TITLE: HOUSING
 -

PART NO.:
 A0601Y-**-AOK*1-P

DWG NO.:
 JKUN-GCCP-0839

SCALE: 1 : 1
 SHEET: 1 / 1

USE: CUSTOMER
 APPD: 刘振岭
 CHKD: 王亮
 DR: 蒋建银

UNITS: mm